

LOCTITE®


Loctite® 3090

Large-Gap Filling 2-Component Instant Adhesive

Loctite® 3090 represents the latest development in 2-component instant adhesive technology combining large-gap filling properties with high bond strength and fast cure.



Henkel

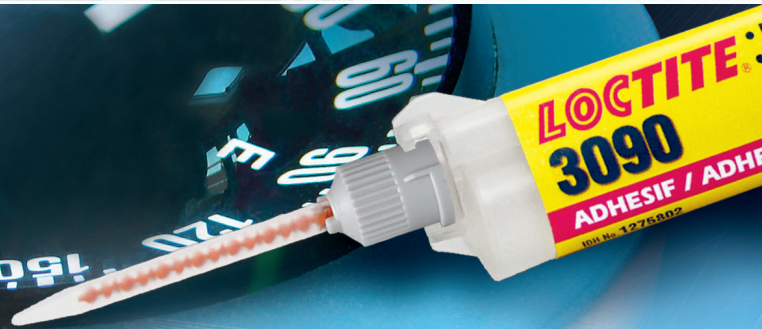

Loctite® 3090

Large-Gap Filling 2-Component Instant Adhesive



- **Handling strength in seconds**
- **Gap fill:**
 - up to 5 mm
- **Gel based:**
 - non-drip formula
- **Allows vertical and overhead application**
- **Innovative 2-component cyanoacrylate technology:**
 - cures quickly independently of gap and substrate
- **Excellent bonding characteristics on a broad variety of substrates:**
 - metals
 - most plastics* like PVC, ABS, PC, PBT
 - rubber
 - porous / absorbent materials such as wood, paper, cardboard, leather and fabric
- **Convenient syringe packaging:**
 - precise and clean application with the static mixer results in a controlled mix ratio

* Note: low surface energy plastics e.g. Acetal, PE, PP and PTFE will require priming with Loctite 770.

Technical data

Colour	uncured	clear
	cured	clear / slightly cloudy
Appearance	high viscosity thixotropic gel	
Viscosity	gel	
Mix ratio (volume)	10 : 1	
Nozzle working time	90 - 180 sec.	
Functional strength	2 - 4 min.	
Ultimate strength	24 h	

Properties of cured material

Lap shear strength, ISO 4587, after 24 hours, 22°C	Gap	0.05 mm	0.5 mm	2.0 mm
	Steel (grit blasted)	22.9 N/mm ²	15.1 N/mm ²	8.2 N/mm ²
	PVC	9.1 N/mm ²	15.1 N/mm ²	9.5 N/mm ²
	Polycarbonate	14.2 N/mm ²	6.4 N/mm ²	5.2 N/mm ²
High gap fill	up to 5 mm depending on bond geometry			
Temperature resistance	-20° to +80 °C (short term 100 °C)			
Chemical resistance	Good environmental resistance.			

The data contained herein are intended as reference only. Please contact Henkel Technical Support Group for assistance and recommendation on specifications for these products.



Henkel Limited
Technologies House, Wood Lane End
Hemel Hempstead, Hertfordshire
HP2 4RQ
Tel: 01442 278100
Fax: 01442 278071
www.loctite.co.uk

® designates a trademark of Henkel AG & Co. KGaA or its affiliates,
registered in Germany and elsewhere © Henkel AG & Co. KGaA, 2010

Available from: